


Electric Boosted Solar

Rough In Diagram

Left Hand Side Pump - Discontinued Model

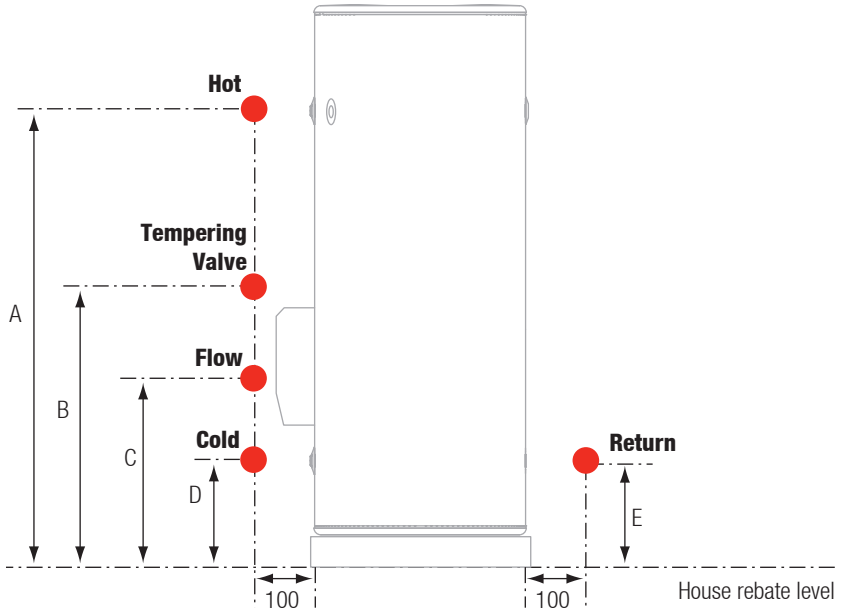

- Approximate location of pipework. A tolerance of 25mm is acceptable to dimensions shown in table below.

Note: Ensure pipes protrude horizontally from wall, and leave enough length of pipe to allow easy connections.

		250 L	315 L	400 L
	Tank Height	1444	1754	1703
	Overall diameter	617	617	705
A	Hot water outlet	1231	1541	1466
B	Tempered water outlet (mid-way between A and C)	505	660	623
C	Flow to solar collectors	600	600	600
D	Cold water inlet	215	215	240
E	Return from solar collectors	215	215	240