



# Owner's Manual

***sunpro***<sup>®</sup>

**(Gas Post-Boost) Solar Water Heater**

Models: D2FN26, D2FL26,  
D3FN26, D3FL26,  
D4FN26, D4FL26  
D2FN20, D2FL20



Installation Details

Owner's Information

Warranty

For advice, repairs and service, call:

1300 365 115 (Australia)

0800 729 389 (New Zealand)



Carefully remove all packaging and transit protection from the heater before installation. Dispose of the packaging responsibly using re-cycling facilities where they exist.

Specifications and materials may change without notice  
Effective for Sunpro Gas Post-Boosted Solar Water Heaters manufactured and sold after 1st Sept 2006.



# Contents

Welcome To Dux Hot Water	1
Installation of the Tank	2
Plumbing Connections	4
Specifications	7
Installation of Collectors	9
Plumbing Connections to Collectors	13
Plumbing Connections – Tank To Collectors	14
Gas Connections	16
Electrical Connections	17
Pump Information	18
Owner's Information	19
System Maintenance	24
Troubleshooting	25
Warranty	27
Other Information	30



## Welcome To Dux Hot Water

Your decision to purchase a Dux Hot Water system will reward you for many years to come.

Since 1915, the Dux range has seen continuous research and development, resulting in many breakthroughs in the efficiency, reliability and longevity of hot water systems.

Dux water heaters are manufactured in Australia in a state-of-the-art facility, using a Quality Endorsed Company production system.

This is your assurance that you have purchased the highest quality water heater available, one that will provide continuous hot water for all your needs – safely, economically, and for many years to come.

To be upfront about it, we want Dux to be your brand of choice. So you can depend on us to provide more than just a hot water system.

You can rely on Dux products and choose them with confidence. We'll make sure you have the information, the quality and the innovation you're looking for, including the latest energy-saving alternatives. If you should ever have a problem – and we'll bet you won't – you'll find that we're easy to get hold of, friendly to talk to and quick to act. Our service is all about providing anything you need as soon as you need it.

Go with Dux and you'll have a dependable, economical, efficient hot water system designed to perform well, year after year. And that's a promise.





# Owner's Manual – Sunpro Gas Post-Boosted Solar Installation of the Tank

## Installer's Guide

Full and detailed installation instructions are in the *Installer's Guide*, included inside the water heater's carton.

## Outdoor Tank Installation

The water heater must be installed outdoors, with the minimum clearances as shown in the figure below.

**We recommend a plinth be installed under the water heater where the water heater is subjected to wet conditions.**

Minimum clearance around the windows and doors must be maintained – refer to AS 5601.

## Location

The water heater should be located as close as possible to the most frequently used hot water outlet. Ensure that the data label is clearly visible and that there is adequate access for servicing the unit.


**Note:** All models are equipped with a sacrificial anode, accessible through the top cover. Allow 50% of the height of the water heater for clearance above to replace the anode.

A properly drained overflow tray must be used where property damage could occur from water spillage. (See AS/NZS3500.4.2 for further details). Warranty does not cover consequential damage due to heater leakage.

## Safety

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

Children and animals should be supervised to ensure that they do not interfere with the appliance.

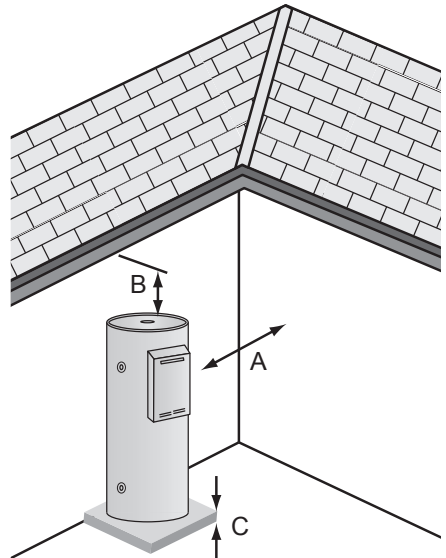

A = 500mm B=300mm C=50mm min  
For further details, refer to  
AS5601 – Gas Installation Code



# Owner's Manual – Sunpro Gas Post-Boosted Solar Installation of the Tank

## Frost Protection

The areas in gray in the map below may be vulnerable to frost.

In these areas, you **must** install an anti-frost valve.

However, **TWO** anti-frost valves must be installed if you live in alpine areas or areas subject to extreme frost, such as the ACT and Snowy Mountain regions.

The anti-frost valve comes in kit form and must be ordered separately.

## Frost Protection Installation Map





# Owner's Manual – Sunpro Gas Post-Boosted Solar Plumbing Connections

## Installation Requirements

This water heater must be installed by a licensed tradesperson, and in accordance with:

- AS/NZS3500.4 “National Plumbing and Drainage Code Hot Water Supply Systems – Acceptable Solutions”.
- AS5601/AG601 “Gas Installations”
- Local authority regulations.
- Outside Australia and New Zealand, please refer to local plumbing and building codes and regulations.
- Notice to Victorian customers from the Victorian Plumbing Industry Commission – this water heater must be installed by a licensed person as required by the *Victorian Building Act* (1993). Only a licensed person will give you a compliance certificate, showing that the work complies with all the relevant Standards and only a licensed person will have insurance protecting their workmanship for 6 years.

## Water Supply Pressure

This water heater is designed for direct connection to water supply pressures of no greater than:

### All Models – 800kPa

Where the mains pressure can exceed or fluctuate beyond the pressure shown above, a pressure limiting device (complying with AS1357) must be fitted in the cold water inlet supply. This device must be installed after the isolating valve and set below the pressure shown above. Note during periods of lower demand water pressure may increase.

**Note:** Plugs are supplied with the water heater to plug off the fittings that are not required. Ensure that a sealing material is applied to the plugs to prevent leaking.

## Pool Heating

This water heater must **not** be used for pool heating.



# Owner's Manual – Sunpro Gas Post-Boosted Solar Plumbing Connections

## **Pressure & Temperature Relief Valve**

The Pressure & Temperature Relief (PTR) Valve is supplied loose with the water heater. The valve rating is:

### **All Models – 1000kPa**

The PTR valve must be installed directly into the top socket marked "RELIEF VALVE". The drain line from this valve must run in a continuously downward direction in a frost-free ambient position with the discharge end left open to atmosphere permanently.

The PTR Valve is not intended to enable connection of the water heater to supplementary energy sources such as solar panels or slow combustion stoves (refer AS/NZS 3500.4 for guidance on these types of installations).

Open the PTR Valve for approximately 10 seconds by lifting the lever on the valve to ensure water is relieved to waste through the relief drain pipe. Lower lever gently and check that it closes correctly.

**Warning:** We recommend that you open the PTR valve at least once every six (6) months. Failure to do this may result in problems with the water heater.

The PTR Valve must not be tampered with or removed. The water heater must not be operated unless this valve is fitted and in working order.

The PTR Valve should be checked for adequate performance or replaced at intervals not exceeding 5 years, or less in areas where local regulations apply.

**Important:** The PTR Valve and its drain outlet pipe must not be sealed or blocked. It is normal for the PTR valve to leak a small amount of water during heating cycles.




# Owner's Manual – Sunpro Gas Post-Boosted Solar Plumbing Connections

## Cold Water Connection

An approved isolating valve, approved non return valve, line strainer (optional but recommended), and union must be fitted between the supply main and the RP $\frac{3}{4}$ "/20mm socket in the water heater.

All fittings must be approved by the relevant Authority and in accordance to the plumbing code.

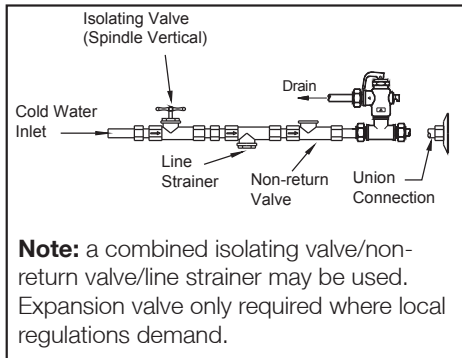

**Note:** a combined isolating valve/non-return valve/line strainer may be used. Expansion valve only required where local regulations demand.

**Note for S.A. and W.A.:** It is a state requirement that a pressure relief valve be fitted on the cold water supply line between the non return valve and the water heater.

## Hot Water Connection

The hot water line should be connected to the "OUTLET" socket on the tank.

## Insulation of Pipes

All hot water pipes **must** be insulated with UV stabilized insulation suitable for solar working temperatures, e.g. Armaflex Insulation.

## Temperature Protection

All solar water heaters have the ability to produce hot water very quickly. To reduce the risk of scald injury, it is mandatory under the requirements of Australian Standard AS/NZS3500.4.2 that a suitably approved temperature control device, such as a tempering valve, be fitted to the hot water supply to outlets used primarily for personal hygiene.


**Note:** This water heater is supplied with a tempering valve. Install the valve according to the manufacturer's recommendations. Any adjustments to the valve should be made according to the manufacturer's recommendations.

The tempering valve should be checked at regular intervals to ensure its operation and settings remain correct.





# Owner's Manual – Sunpro Gas Post-Boosted Solar Specifications

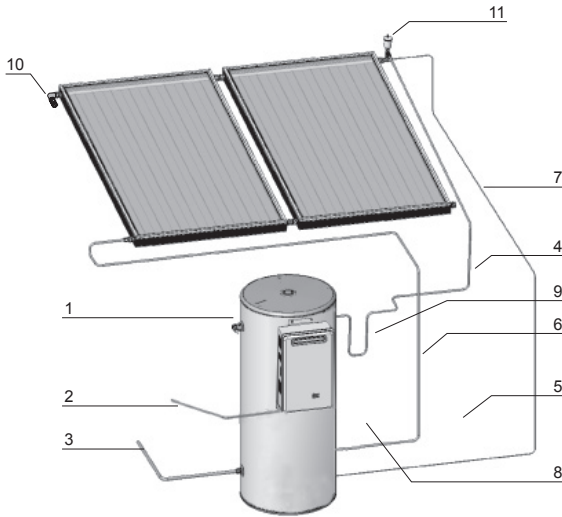

## System Components

1	Outlet connected to the heat exchanger water inlet
2	Hot Water Outlet To House
3	Cold Water Inlet
4	Solar Collector Return
5	Gas Inlet
6	Solar collector flow
7	Sensor Cable
8	Power Supply Cord
9	Heat Trap (300mm recommended)
10	Frost Protection Valve
11	Air Bleed Valve


## Installation Dimension Table

		250L (mm)	315L (mm)	400L (mm)
Tank Height		1444	1754	1703
Tank Diameter		617	617	705
Hot Water Outlet	– From Base	765 LHS	1075 LHS	1025 LHS
	– From Wall †	737	737	825
Cold Water Outlet	– From Base	215 LHS	215 LHS	240 LHS
	– From Wall †	308	308	352
Gas Entry	– From Base	765 RHS	1075 RHS	1025 RHS
	– From Wall †	717	805	805
Hot Return Lines from Collectors	– From Base	1231 RHS	1541 RHS	1466 RHS
	– From Wall †	308	308	352
Cold Flow Line to Collectors	– From Base	460 RHS	760 RHS	710 RHS
	– From Wall †	672	672	760

† Measurements from wall – minimum distance of unit from structure still applies as per plumbing codes. All measurements approximate only. Specification and material may change without notice.



# Owner's Manual – Sunpro Gas Post-Boosted Solar Specifications

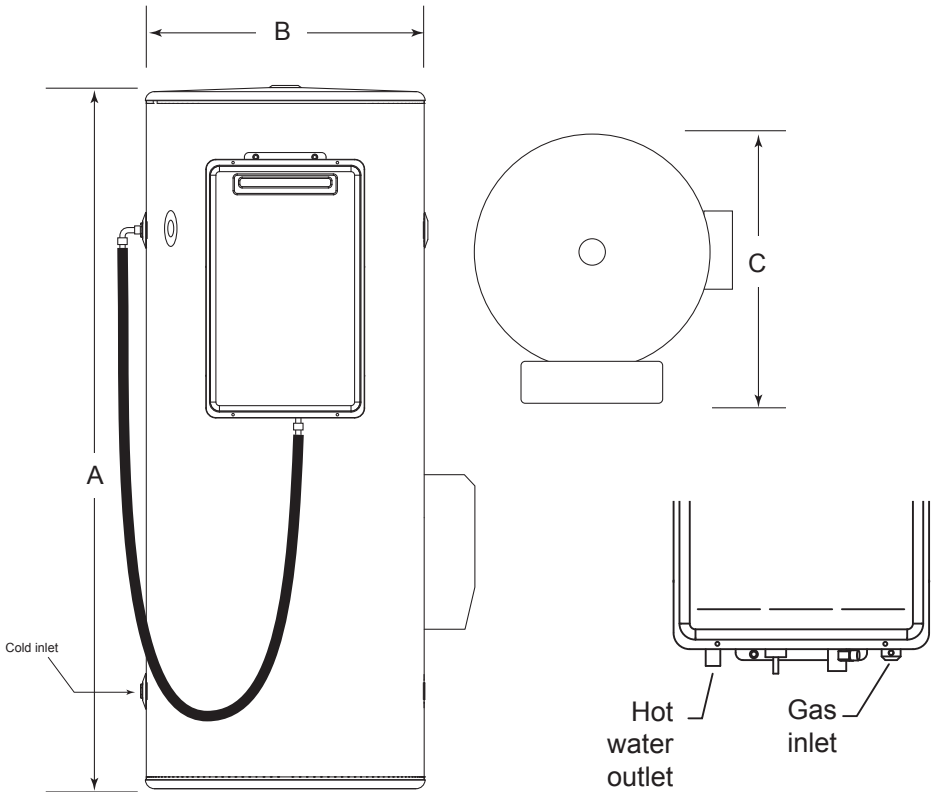

Model	Mass (kg)	Dimensions (mm)			Nominal Capacity (L)
		A	B	C	
250L	118	1444	617	832	250
315L	133	1754	617	832	315
400L	144	1703	705	920	400

**Note:** Minor changes to specifications and materials may occur without notice. Whilst these will not affect the safety, reliability or performance of your Dux unit they could impact on the installation procedures explained in this manual – check with Dux on 1300 365 115 if you are uncertain about any aspect of installing this product.



# Owner's Manual – Sunpro Gas Post-Boosted Solar Installation of Collectors

## **Installer's Guide**

Full installation instructions for the collectors are in the *Installer's Guide*, included inside the water heater's carton.

## **Safety**

Do not commence an installation until you have satisfied yourself that all safety issues associated with working on and lifting components onto a roof have been addressed.

## **Local Authority Regulations**

All work associated with the installation must comply with local authority regulations, including AS/NZS 3500.4.2.

Where these installation instructions and local regulations are in conflict, local regulations must prevail.



# Owner's Manual – Sunpro Gas Post-Boosted Solar Installation of Collectors

## Location of Solar Collectors


There are several factors to consider in selecting the collector location site:

- For best performance, the collectors need to face true north. Due to the high solar energy levels experienced in Australia, installations on angles of up to 45° away from true north will not have a major effect on the annual solar output. Consequently, **installations up to 45° away from true north are acceptable.** See Collector Orientation Compass on page 11.
- If the collectors are installed with an east facing bias, the best solar input is achieved in the morning and if there is a west facing bias, the best solar input is in the afternoon.
- The collectors should be installed with a **minimum inclination of 10° and a maximum inclination of 45°.** See Collector Inclination Guide on page 11.
- Careful site inspection is required to ensure the selected location is not subjected to shading from adjacent trees or buildings at any time of the day, but particularly between **9am and 3pm, the highest solar input times.**
- Remember that shadows are longer in winter than in summer, so a site that is free of shadows from adjacent objects in summer may have some shadows in winter.
- To optimise efficiency, the collectors should be as close as possible to the storage tank.
- For best performance, the collectors should be located no more than 20m from the storage tank.
- Ensure that the roof structure is suitable to support the weight of the collectors. The collectors weigh approximately **40kg** each when full.



# Owner's Manual – Sunpro Gas Post-Boosted Solar Installation of Collectors


## Collector Orientation Compass

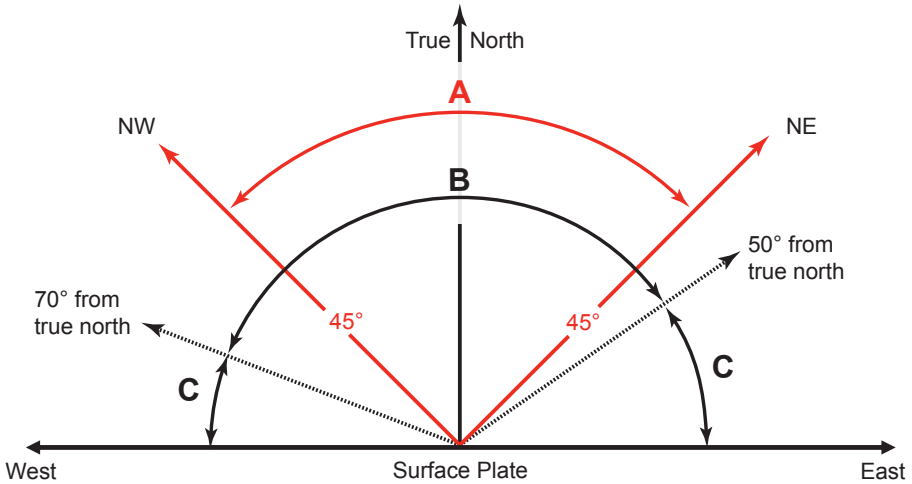

- A. Dux preferred range
- B. Industry accepted range
- C. If orientations A or B are not practical, an additional collector can be installed at the home owner's discretion in range C (not required north of Tropic of Capricorn)

**Note:** When establishing the correct Collector Orientation, please account for the Magnetic Declination of your geographic location

## Collector Inclination Guide

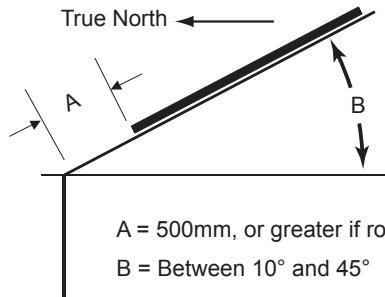

- A = 500mm, or greater if roof allows
- B = Between 10° and 45°



# Owner's Manual – Sunpro Gas Post-Boosted Solar Installation of Collectors

## Collector Rail Kit

The Collector Rail Kit that comes with this water heater is designed for mounting the collectors to most common Australian roof types.

All kits consist of specially designed rails, clamps and bolts etc. that are used to fix the collectors to the roof structure. With the exception of the copper tube and roofing bolts, these kits contain all of the plumbing components required to connect the collectors to the ground mounted water heater.

Refer to the collector rail kit instructions located in the rail kit box. The rail kit instructions can also be obtained from Dux Service on 1300 365 115.


For installations requiring three collectors, an additional Collector Rail Kit is required as an extension to increase the mounting capacity from two to three collectors.

## Roof Space

It is not advisable to install collectors on roof spaces that are smaller than described below:

- 2 collectors: 3m wide × 3m high
- 3 collectors: 4.5m wide × 3m high

Roof areas smaller than these minimum measurements will make installation and later service work difficult.

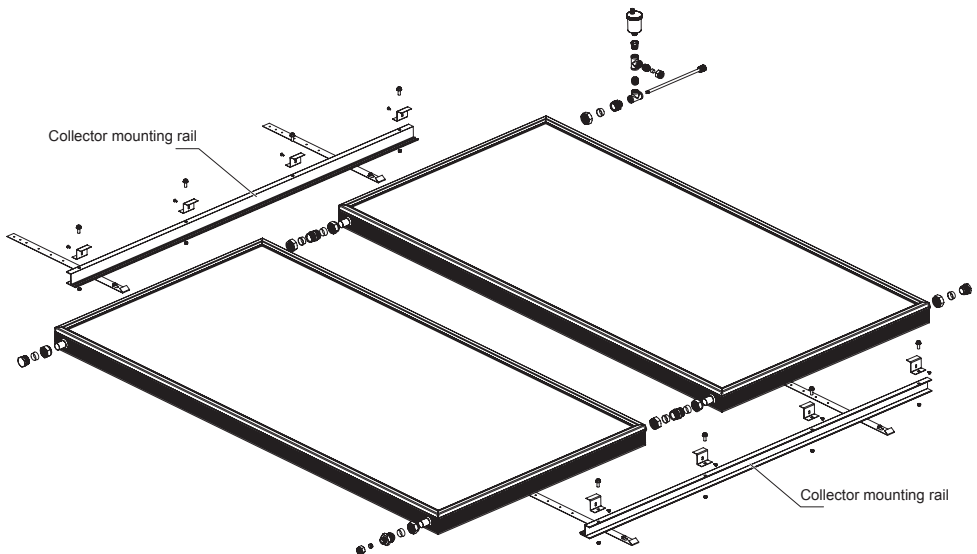



## Plumbing Connections to Collectors

### Insulation

Irrespective of the pipe length, both the solar flow and return lines **must** be insulated with UV stabilized insulation suitable for solar working temperatures, e.g. Armaflex DuoSolar/Solar insulation.

### No Plastic Fittings

Only DR brass and copper pipes and fittings must be used. Plastic fittings and PVC pipes are not able to withstand the high temperatures  $>200^{\circ}\text{C}$  that the system can create. Failure to use fittings with a high temperature rating will void the warranty.


### Connections To The Collectors

Connect the sealing fittings to the four outer connections on the collector array:

1. Fit a sealing washer and plug assembly to the top left and bottom right corners of the array.
  - a. Tighten the assembly taking care not to twist the copper tubes of the collector.
  - b. Ensure you use correctly sized spanners.
2. Screw fit the Air Bleed Valve into the top  $\frac{3}{8}$ " BSP socket and hand tighten until the nylon ring seals against the socket face.
3. Fit the sealing washer and union base fitting to the top right hand socket of the collector array.

4. Place the Hot Connection Union assembly onto the union base then tighten with the air bleed valve vertical. (NB: The air bleed valve should be at the highest position on the collectors).
5. Finally insert a washer and  $\frac{3}{4}$ " to  $\frac{1}{2}$ " conetite union to the lower left collector socket.

The collector array is now completed and ready for connection to the water heater system.

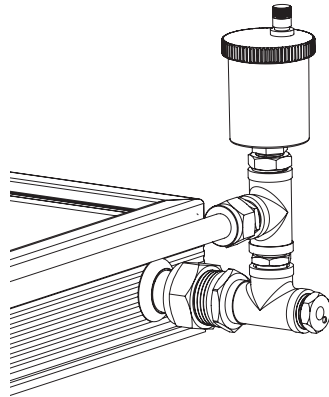



## Plumbing Connections – Tank To Collectors

To make the connection between the solar collector array and the storage tank, the following is required.

1. 2 × ½" (15 mm) copper pipes, run from the collector array down to storage tank.

**Note:** Pipes **must** be insulated with minimum 13mm UV stabilized insulation suitable for solar working temperatures, e.g. Armaflex insulation.

2. 1 × 2 core cable (supplied in kit) run from the collector array to the storage tank.

To complete this connection, do the following:

1. Connect one ½" insulated copper tube to the ½" BSP Compression Union Assembly at the bottom left hand corner of the array and run down to the ground mounted storage tank location. This tube is known as the Collector Cold Connection.
2. Connect the second ½" insulated copper tube to the Hot Connection assembly at the top right hand corner connection of the array and run down to the ground mounted storage tank location. This tube is known as the Collector Hot Connection.

3. Connect the 2 core cable (20 metres – supplied) to the two wires of the BLACK insulated temperature sensor (RED ring around the wire to indicate for hot water). Ensure that the connection is secure and safe. Use a connector block. Insert the temperature sensor into the temperature sensor well of the hot connection union assembly. Fix in place using cable bracket connected to hot connection fitting and seal using a small amount of silicon adhesive/sealant. Run the cable down to the ground mounted storage tank location. This sensor is known as the Collector Temperature Sensor. Ensure that the sensor wire does not come in contact with the hot collector return pipe.

**Note:** Care must be taken to ensure that all roof penetrations are sealed to prevent water ingress and to comply with all local regulations.







## Plumbing Connections – Tank To Collectors

### Connections At The Ground Mounted Storage Tank

**Note:** The tank has been pre configured for the hot collector return to be connected to the top socket on the right hand side of the tank (as marked).

Finally, take the collector sensor cable and pass it through the bottom cover to the Resol controller. Connect it to S1 and secure it with a cable clamp. Replace cover of the Resol controller.

The polarity of the connections is not important.

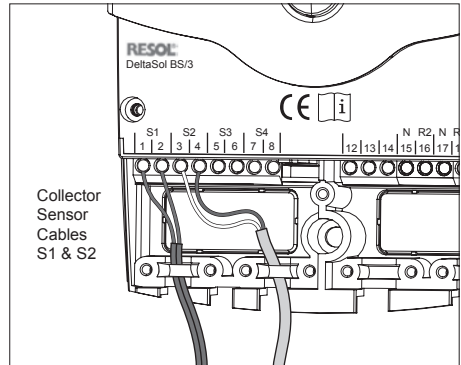




# Owner's Manual – Sunpro Gas Post-Boosted Solar Gas Connections

Refer to the Data Label for correct gas type. Gas piping should be connected through the gas inlet as shown in the illustration below.

The plastic grommet must be installed around the pipe and clipped into the case.

The gas control is fitted with a RC $\frac{1}{2}$ "/15 socket. A union connection should be used.

Gas pipe sizes should be in accordance with AS5601/AG601.

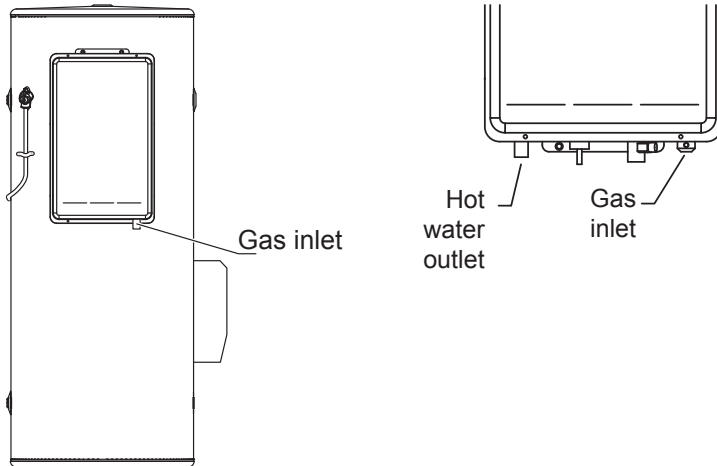



## Electrical Connections

### Electrical connection

Covers providing access to live electrical parts should be removed only by a licensed electrician.

The electrical power supply must be isolated at the main electrical supply switchboard before any electrical cover is removed.

This water heater is designed for connection to **CONTINUOUS TARIFF** for the Solar Pump Module.

The electrical connection must comply with Local Supply Authority Regulations and AS3000.

### Note

1. All electrical work must comply with local regulations and be conducted by a licensed electrician.
2. The electrical supply to the pump module must be continuously available. **Off Peak power must not be used.**
3. Connections are made at terminal block inside the water heater. Entry to connection area is through the hole beneath the element cover, designed to accept a 20mm conduit.

### Power Cables

Power cables should be routed away from any hot water pipes. If this is not practical, insulate the hot water pipes to avoid direct contact with the power cables.

If the power cable is damaged, it should be replaced by a lead assembly available only from Dux service agents.



# Owner's Manual – Sunpro Gas Post-Boosted Solar Pump Information

## Pump Module Electrical Connection (All Models)

The electrical supply to the pump module must be continuously available.

**Off Peak power must not be used.**



## Solar Pump and Controller Module

The controller box draws a maximum of 28 watts at full load. The box should be plugged in to a weatherproof approved power outlet for 10amps, 230 to 250 volt, 50Hz supply.

The controller must be wired according to the diagram below.

## Controller Status Lights

Status Light	Condition
Green LED	Pump operating
Red LED	Check sensor connections

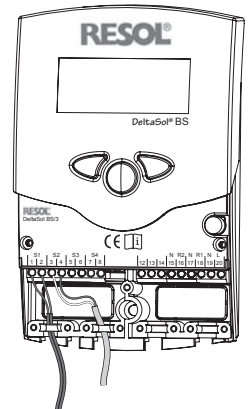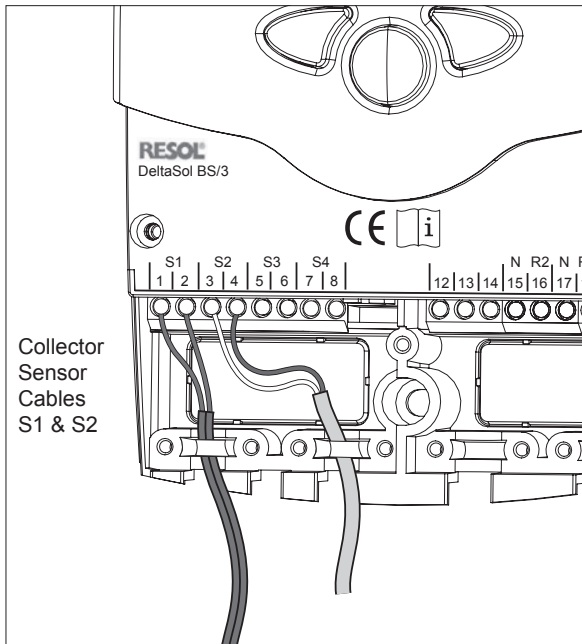



## Owner's Manual – Sunpro Gas Post-Boosted Solar Owner's Information

### **Safety**

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

Children and animals should be supervised to ensure that they do not interfere with the appliance.

### **Flammable Materials**

It is essential for the safe operation of this gas heater that clothing or any other flammable material should not be placed against or on top of the water heater. In addition, do not store flammable or corrosive materials, such as dry cleaning fluids, pool chemicals, etc., in close proximity to the heater.

The use of aerosol sprays in the vicinity of the heater should be avoided. The propellant gases used in these devices, e.g. fly-spray, hair-spray and laundry aids, can break down in the flames of the burner and produce corrosive agents.

### **Water Quality**

Your Dux water heater has been manufactured to suit water conditions of most Australian metropolitan supplies. Please note that harsh water supplies can have a detrimental effect on the water heater and its life expectancy. If you are unsure about your water quality you can obtain information from your local water supply authority.

The water heater is designed for use in areas where the Total Dissolved Solids (TDS) content of the water supply is less than 2500 mg/L. In areas where the TDS exceeds 600mg/L the magnesium alloy anode (supplied in the heater) may become over reactive. To alleviate this, the anode should be replaced with an aluminium alloy anode, available from your local Dux supplier.

Water can also be very corrosive, measured by the saturation index. If the water saturation index is greater than 0.40 an expansion control valve should be fitted and where the index is greater than 0.80 the water heater installed should be a Hard Water Model. Please consult our Service Department for advice if required.



## Owner's Information

### What Should I Do During Holidays?

The system can monitor and control the solar collector temperature while you are away. Whilst the system is safe with the power turned OFF, the collector temperatures can reach very high temperatures, causing high stress to their internal components.

**Warning:** If the hot water system is not used, for two weeks or more, a quantity of hydrogen gas, which is highly flammable, may accumulate in the water heater. To dissipate this gas safely, it is recommended that a hot tap be turned on for several minutes at a sink, basin or bath but not a dishwasher, clothes washer, or other appliance. During this procedure there must be no smoking, open flame or any other electrical appliance operating nearby. If hydrogen is discharged through the tap, it will probably make an unusual noise similar to air escaping.

**Note:** Important there are no user serviceable components in the system. Only an authorised service representative is permitted to remove any covers or make setting adjustments. Do not open or adjust any electrical covers or devices yourself.

### How Long Will The Heater Run Each Day?

The length of time that the solar heater will run each day will vary dependent upon the amount of hot water being used by the household and the availability of sunlight to heat the solar collectors.

**Caution:** All water heaters have the ability to produce hot water in a surprisingly short time. To reduce the risk of scald injury, it is mandatory under the requirements of Australian Standards AS3500 that an Australian Standards approved temperature control valve, such as a tempering valve, be fitted to the hot water supply pipe work. This valve should be checked at regular intervals to ensure its operation and settings remain correct.



## Owner's Manual – Sunpro Gas Post-Boosted Solar Owner's Information

### **Solar Collector Shading**

Trees or buildings can shade the solar collectors, similarly dirt can build up on the glass cover. If this occurs, trees should be trimmed back or the system relocated. If the glass is dirty, it should be cleaned with a domestic glass cleaner – by an authorised tradesperson.

Hot water used in showers, washing machines and dishwashers can be underestimated. Review appliances to determine your daily usage is greater than the storage volume of your water heater.

It is also advisable to inspect tap washers etc. for leakage and replace if necessary.

### **Review Your Water Usage**

Hot water used in showers, washing machines and dishwashers can be underestimated. Review appliances to determine your daily usage is greater than the storage volume of your water heater.

It is also advisable to inspect tap washers etc. for leakage and replace if necessary.

### **How Does My System Work?**

The main components of your solar water heater are the water storage tank, the solar collector(s), the Resol controller and the Ancillary gas booster. The Dux water storage tank is used to store the heated water ready for household use. It is a specific Solar Dux electric storage tank, incorporating a high temperature vitreous enamel lining to provide long life, and a high density polyurethane insulation to ensure minimal heat loss.

The solar collectors contain a multi tube copper water way system bonded to a solar absorber plate, the combination of which collects solar energy and transfers it to the fluid within the collector circuit. The absorber plate system is enclosed in an insulated casing covered with a high strength, low iron glass sheet that protects the absorber system from physical damage.



## Owner's Manual – Sunpro Gas Post-Boosted Solar Owner's Information

### **AES System**

The Ancillary Energy Support System (Gas boosting – connected to continuous gas supply) is used to heat part of the stored water on those occasions when there is reduced solar energy available. e.g. cloudy days. The AES System is thermostatically controlled so it only delivers the energy required then automatically turns off.

**Never turn the gas supply off during normal use.**

Under normal operating conditions the water within the storage tank is heated by the solar collectors.

In an Open Circuit system, the water is in the collector circuit and the circulating pump draws cold water from the bottom of the tank and pushes it up into the solar collectors. The water is heated in the collector by absorbing heat from the sun and continues on its pumped circulation path back to the top (hot section) of the Dux storage tank, ready for use.

### **What Does The Circulation Pump Do In The System?**

The Circulation Pump is a simple device used to circulate the water in the collector circuit. This, in turn, enables solar energy from the collectors to be transferred to the storage tank location. The pump consumes only a very small amount of electrical energy (less than 28 watts) to perform this task. The circulation pump has an integral 'non-return valve' to prevent solar energy from reverse cycling back through the storage tank to the collectors at night.

The electronic control device used to control the circulation pump has a complex set of activities. It is the brain of the system and ensures optimum system efficiency and safety. The basic functions are:

1. Detecting availability of useful solar energy in the solar collectors. When the temperature of the solar collector is 10°C higher than the storage tank temperature, the circulation pump is initiated. If the difference in temperature falls to less than 2°C the circulation pump is stopped.
2. Controlling maximum storage tank temperature. If the storage tank temperature reaches 85°C, the circulation pump is stopped to prevent excessive temperatures in the storage tank.





## Owner's Information

3. Frost Protection. When the temperature of ambient conditions adjacent to the collector sensor drops to 5°C the circulation pump will start and run for a minimum of 5 minutes to prevent the collector from freezing. The pump circulates hot water from the storage tank through the collectors until the collector sensor registers that the collector temperature has been raised to 9°C, at which point the pump is shut down.
4. Anti Frost Valve. A secondary level of protection is also available through the use of an Anti Frost Valve. This valve opens and releases water from collectors when ambient air temperatures are between below 3°C and 4°C. The valve also isolates the collector and connecting pipework from the tank to prevent the loss of heated water from the tank.



# Owner's Manual – Sunpro Gas Post-Boosted Solar System Maintenance

This water heater is designed such that there is little to do regarding system maintenance other than that detailed in this *Owner's Manual*. The solar components do not require maintenance.

Personally inspecting or servicing any part of the system is not recommended.

Should you decide to personally inspect the roof mounted system components, it is essential that you use all safety devices required to ensure your safety.

After each 5 years of operation you should contact the local service agent to replace all safety valves and anodes to ensure continued system life and operational safety. In locations where the water has a TDS greater than 600 ppm, this service is recommended each 3 years.

## Six Monthly Service – By Owner

Open the PTR Valve for approximately 10 seconds by lifting the lever on the valve to ensure water is relieved to waste through the relief drain pipe. Lower lever gently and check that it closes correctly.

## One Year Service – By Authorised Personnel Only

Inspect and clean pump turbine of any foreign material. If water quality is poor, carry out inspection more frequently.

## Five Year Service – By Authorised Personnel Only

The five year service must be carried out by a licensed tradesperson. It is

recommended that this service be carried out by your local Dux agent.

The service should include the following:

- Replace the Pressure & Temperature Relief Valve.
- Replace the anodes (in areas of harsh or adverse water conditions, a more frequent check of the anodes is recommended).
- Cleaning of collectors to improve solar collection.
- Flush the water heater by doing the following:
  - i. Turn off the power.
  - ii. Turn the cold water supply to water heater at the isolating valve.
  - iii. Gently operate the easing lever on the Pressure & Temperature Relief Valve to release the pressure in the water heater.
  - iv. Disconnect cold water inlet union to heater and attach drain hose.
  - v. Gently operate the Pressure & Temperature Relief Valve to let air into the heater and allow water to escape through the hose.
  - vi. Flush the heater until clear water appears then reconnect all fittings, fill the heater and restore the electricity supply.

## Draining the Water Heater

To drain the water heater, follow steps i to v above until no more water escapes from the appliance.



## Owner's Manual – Sunpro Gas Post-Boosted Solar Troubleshooting

### **What Should I Check Before Making A Service Call?**

If there is not enough hot water, it is recommended that the following points be considered before making a service call. If after checking the following points the problem has not been identified, please contact Dux on 1300 365 115.

### **No Hot Water**

- Is the Pressure & Temperature Relief Valve discharging too much water?
- Do you have the correct size water heater for your requirements? Sizing details are available from your Dux supplier.
- Is one outlet (such as the shower) using more hot water than you think?
- Carefully review the family's hot water usage and if necessary check the shower flow rates with a bucket, measuring the amount of water used over that period of time. If it is not possible to adjust water usage patterns, an inexpensive flow control valve can easily be fitted to the shower outlet.
- Consider that during night time heating, the time taken to heat the tank can take longer, so you may find that the tank has not fully recovered from a period of heavy usage the previous evening.
- Consider that often the hot water usage of showers, washing machines and dishwashers can be under-estimated. Review these appliances to determine if your daily usage is greater than the storage volume of your water heater. For example, if you have a 315 litre storage tank and you are using 450 litres of water, it is possible that there will be certain times of the day where there is insufficient hot water. It is also advisable to inspect tap washers etc. for leakage and replace if necessary.
- Is there a leaking hot water pipe or dripping hot water tap? A small leak can waste a large quantity of hot water.
- Replace faulty tap washers and have your plumber rectify any leaking pipe work.



## Owner's Manual – Sunpro Gas Post-Boosted Solar Troubleshooting

### **Water Discharge from the Pressure & Temperature Relief (PTR) Valve**

It is normal for the PTR to allow a small quantity of water to escape during the heating cycle. The amount of discharge will depend on hot water usage.

### **Continuous trickle (PTR)**

This is most likely due to a build up of foreign matter. In this case, try gently raising the easing lever on the PTR Valve for a few seconds, then release gently. This may dislodge a small particle of foreign matter and rectify the fault.

### **Steady flow (PTR) – more than 20L per day**

This may be caused by excessive water supply pressure, a faulty PTR Valve or a faulty thermostat. Turn off the electricity supply and contact Dux on 1300 365 115.

### **Condensation in Collectors**

In winter, or in times of heavy rain, water vapour may form in the warm and humid solar collectors, and then condense on the inside surface of the cold glass.

As solar collectors are insulated for optimum performance and have minimal internal airflow, condensation that has formed during these times takes a longer time to disperse but will do so when enough direct sunlight has come in contact with the collectors. The warmer the sunlight, the faster it will disperse.

Condensation in the collectors does **not** affect the system's performance.



# Owner's Manual – Sunpro Gas Post-Boosted Solar Warranty

## **Dux Hot Water Unit**

### **Manufactured by Dux Manufacturing Limited (“Dux”)**

### **Terms of Warranty and Replacement Guarantee**

All Sunpro Gas Boosted Solar water heaters manufactured and sold after 1 January 2011 are backed by a comprehensive one (1) year full parts and labour warranty (conditions apply – see below).

Furthermore, the Sunpro Gas Boosted Solar tank and solar collectors include a guarantee to replace your hot water unit if the inner cylinder fails within five (5) years and to replace the solar collector if it fails within five (5) years (conditions apply – see below).

The terms of the Warranty and replacement guarantee are set out below.

### **1 Year Comprehensive Warranty**

Your hot water system and its components (“Unit”) are covered by 1 year (parts and labour) warranty against defective factory materials or workmanship.

This warranty period commences from the date of installation of the Unit providing you have proof of this installation date. Where the date of completion of installation is not known or cannot be proven, then this warranty will com-

mence one (1) month after the date of manufacture (refer to the data label on the unit).

### **5 Year Replacement Guarantee**

If an inner cylinder or solar collector fails on a Dux hot water unit within a further four (4) years after the end of the initial one (1) year warranty period, Dux will provide a free replacement hot water unit and/or solar collector at the nearest approved Dux agent or Dux office to the owner's home. Under this replacement guarantee, the transport, installation and labour costs of delivering the replacement hot water unit and removing and replacing the existing hot water unit will be the responsibility of the owner of the existing hot water unit. Please note that Plumbing regulations require that the replacement collector be re-installed by a licensed Plumber.

### **Conditions of Warranty and Replacement Guarantee**

The benefits provided to you by the warranty and replacement guarantee (collectively “Warranty”) are in addition to the guarantees and other rights and remedies available to you under the Australian Consumer Law (“ACL”).

If the Unit fails to conform to this Warranty during the applicable period, Dux will replace any failed component or where necessary, in the absolute discretion of Dux, replace the Unit free of charge including reasonable labour



## Owner's Manual – Sunpro Gas Post-Boosted Solar Warranty

costs incurred in normal business working hours.

This Warranty only applies to defects which have arisen solely from faulty materials or workmanship in the Unit and does not apply to other defects which may have arisen as a result of, without limitation, the following: accidental damage, abuse, misuse, maltreatment, abnormal stress or strain, harsh or adverse water conditions including excessive water pressure or temperature, neglect of any kind or otherwise as a result of any use of the Unit contrary to the product manual or other instructions provided by Dux. Alterations or repair of the Unit other than by an accredited and licensed service agent or technician are not covered. Attachment of accessories or use of non genuine replacement parts other than those manufactured or approved by Dux are not covered by this Warranty.

This Warranty applies only to the Unit and does not cover any ancillary plumbing or electrical parts supplied by the installer such as pressure limiting valve, tempering valve, line strainer, stop cocks, non-return valve, electrical switches, pumps or fuses, or faulty installation.

The Unit must be installed by a licensed plumber in accordance with information set out in the Owner's Manual and/ or Installer's Guide supplied with the

Unit and/or any relevant statutory requirements.

In addition to this Warranty, certain legislation (including the ACL) may give you rights which cannot be excluded, restricted or modified. This Warranty must be read subject to such legislation and nothing in this Warranty has the effect of excluding, restricting or modifying those rights.

If Dux fails to meet a guarantee under the ACL, your remedy for such failure may be limited to any one or more of the following:

- replacement of the Unit;
- repair of the Unit;
- refunding the cost of the Unit;
- payment of reasonable costs of having the Unit repaired;
- payment in respect of the reduced value of the Unit.

Any defective part of the Unit must be returned to the point of sale before replacement can be considered under the terms of this Warranty. If the costs of returning any defective parts are unreasonable, please contact Dux on 1300 365 115 (Australia) or 0800 729 389 (New Zealand) so that we can arrange a collection if appropriate.

Warranty claims can be made at the point of sale or by posting or faxing a warranty claim to Dux (contact details



# Owner's Manual – Sunpro Gas Post-Boosted Solar Warranty

listed below) within one (1) month of the appearance of a defect. Warranty claims under this extended warranty must include the following details:

- Date of Purchase;
- Location of Purchase;
- Proof of Purchase;
- Date of Installation;
- Contact Details
- Product Serial Number

## **Contact details**

Dux' contact details are as follows:

### **Business Address:**

Dux Manufacturing Limited  
Lackey Road  
Moss Vale, NSW, 2577  
Australia

### **Telephone:**

1300 365 115 (Australia)  
0800 729 389 (New Zealand)

### **Facsimile:**

(61 2) 4868 0257

### **Email:**

[duxaftersales@gwagroup.com.au](mailto:duxaftersales@gwagroup.com.au)

**Note:** If the Unit is located in a position that does not comply with the installation instructions or relevant statutory requirements, then this Warranty does not cover major dismantling or removal of cupboards,

doors, walls or special equipment and/or excessive labour, at the determination of Dux, to make the Unit accessible for repair or replacement.

As required by legislation, including under the ACL, any claims for damage to furniture, carpets, walls, foundations or any other consequential loss either directly or indirectly due to defects of any kind in a Unit will only be met by Dux where the damage could be considered reasonably foreseeable.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.



# Owner's Manual – Sunpro Gas Post-Boosted Solar Other Information

Product Warranty is applicable only in Australia and New Zealand.

See page 27 for terms of warranty.

*Privacy Act Amendment (2000):* If and whenever warranty service is required, your personal details will be given to an Authorised Dux Service Agent only for the express purpose of carrying out the arranged warranty service work agreed by you the client and Dux Manufacturing Limited.

### Your Details

For future convenience, fill in the following details and retain with your original invoice for your own records.

Surname:.....Given Name(s):.....

Address:.....

Town/Suburb:.....

State/Territory:..... Postcode:.....

Date of Purchase:..... Purchased From:.....

Model:..... Serial Number (located on back cover):.....

Date of Manufacture:.....

(Details on Data Label on water heater)

### Installer's Details:

Date of Installation:..... Installer's Name:.....

Address:.....

Installer's Signature:.....

### Service Details:

Date of Service:..... Serviced By:.....

Work Carried Out:.....

.....

.....

Signature of Service Agent:.....











# sunpro®

## (Gas Post-Boost) Solar Water Heater



For advice, repairs and service, call:

1300 365 115 (Australia)

0800 729 389 (New Zealand)

### Please Register Your Water Heater



Please take a moment to fill out your details for warranty registration at:

[www.dux.com.au/warranty](http://www.dux.com.au/warranty)

This will ensure all your current details are registered with us for prompt warranty service if required.

### Preventative Maintenance



Maintaining your hot water system will help extend its lifespan and reduce running costs.

Please register for preventative maintenance at:

[www.dux.com.au/maintenance](http://www.dux.com.au/maintenance)

Serial Number

