
Electric Boosted Solar

Rough In Diagram

Right Hand Side Pump - Current Model

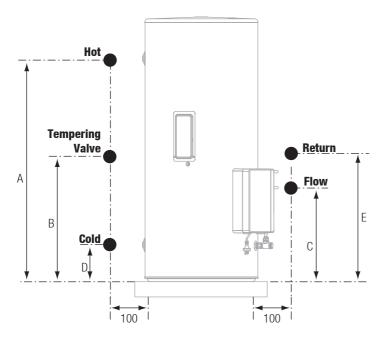

Approximate location of pipework. A tolerance of 25mm is acceptable to dimensions shown in table below.
Note: Ensure pipes protrude horizontally from wall, and leave enough length of pipe to allow easy connections.

		250 L	315 L	400 L
	Tank Height	1444	1754	1704
	Overall diameter	617	617	705
А	Hot water outlet	1211	1521	1445
В	Tempering Valve	Mid-way between hot and cold pipes		
С	Flow to solar collectors	507	507	531
D	Cold water inlet	195	195	219
Е	Return from solar collectors	628	838	642